




THE NOVO SERIES














NOVO 18

NOVO 24

NOVO 38

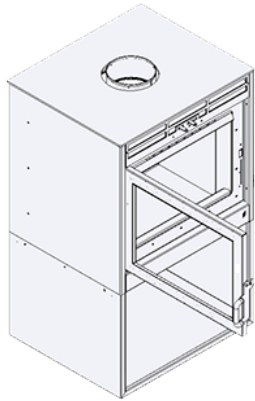

UNIVERSAL TABLE

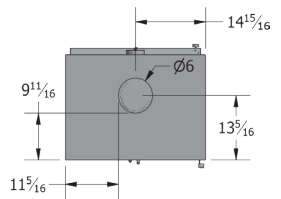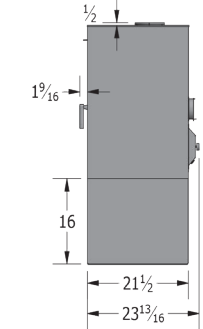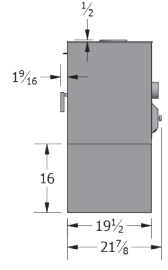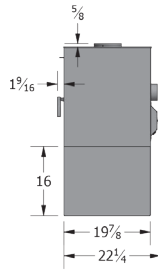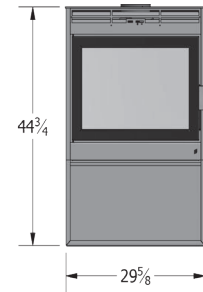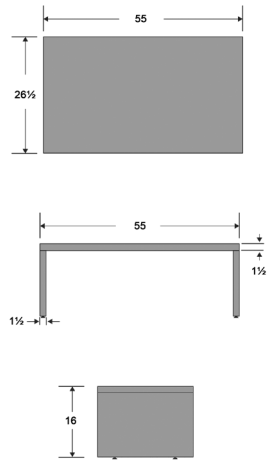


	HEAT CAPACITY	500 to 1,000 sq.ft.	500 to 1,500 sq.ft.	1,000 to 2,500 sq.ft.
	HEATING TIME	Up to 10 hours	Up to 10 hours	Up to 12 hours
	EPA FIREBOX SIZE	1.8 cubic feet	2.4 cubic feet	3.8 cubic feet
	GLASS DIMENSIONS	17 1/8" x 12"	23" x 12 3/4"	22 3/4" x 15 3/8"
	MAX. HEAT OUTPUT	60,000 BTUs	75,000 BTUs	125,000 BTUs
	LOG SIZE	Maximum: 18" Recommended: 18"	Maximum: 24" Recommended: 18"	Maximum: 23" Recommended: 18"
	EMISSIONS	1.99 g/h EPA 2020 Certified	1.77 g/h EPA 2020 Certified	1.85 g/h EPA 2020 Certified
	CHIMNEY	6 inch listed to UL103/ ULC S629 standards	6 inch listed to UL103/ ULC S629 standards	6 inch listed to UL103/ ULC S629 standards
	WEIGHT			
	FIREPLACE	230 lbs	250 lbs	300 lbs
	PODIUM	50 lbs	55 lbs	60 lbs
	TABLE	120 lbs	120 lbs	120 lbs


CLEARANCES TO COMBUSTIBLES

The Novo stove has been certified under the ULC S627 (Canada), UL 1482 (USA), and UL 737 (USA) safety standards. The clearances below must be respected to ensure safe operation of the unit under normal and extreme conditions.


WARNING: Failure to follow the information below is a safety hazard and may result in property damage.

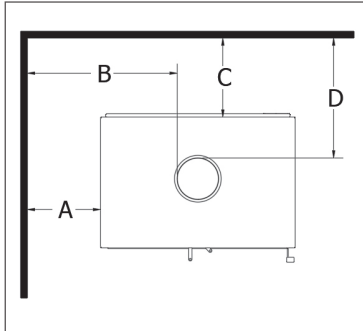


Standard Installation

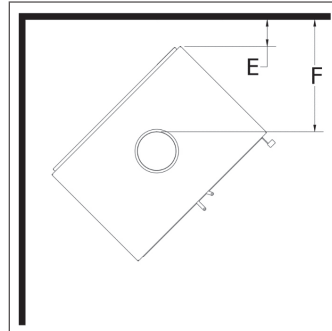

Corner Installation

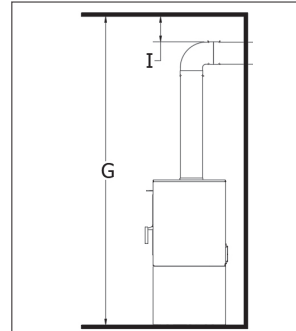

Through Wall Installation

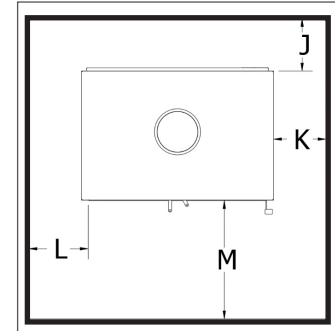

Floor Protector

Single Wall Connector	Canada			USA		
	Novo 18	Novo 24	Novo 38	Novo 18	Novo 24	Novo 38
A	18"	14 7/8"	14 7/8"	18"	14 7/8"	14 7/8"
B	26 1/2"	26 1/2"	26 1/2"	26 1/2"	26 1/2"	26 1/2"
C	11 1/2"	11 7/8"	12 1/2"	11 1/2"	11 7/8"	12 1/2"
D	18"	18"	18"	18"	18"	18"
E	6 1/8"	4 1/4"	4 1/2"	6 1/8"	4 1/4"	4 1/2"
F	18"	18"	18"	18"	18"	18"
G	84"	84"	84"	84"	84"	84"
I	18"	18"	18"	18"	18"	18"
J	8"	8"	8"	0"	0"	0"
K	8"	8"	8"	N/A	N/A	N/A
L	N/A	N/A	N/A	8"	8"	8"
M	18"	18"	18"	16"	16"	16"

Clearances to Combustibles for Direct Floor Installation

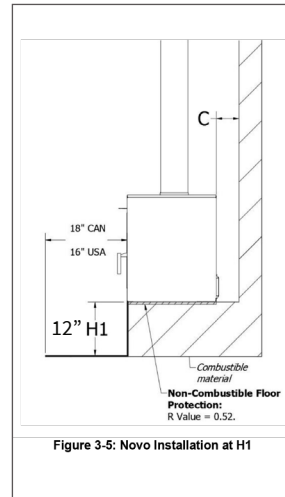


Figure 3-5: Novo Installation at H1

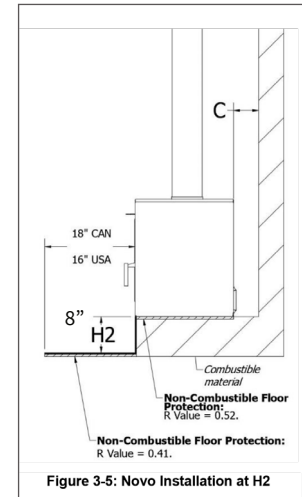


Figure 3-5: Novo Installation at H2

Double Wall Connector	Canada			USA		
	Novo 18	Novo 24	Novo 38	Novo 18	Novo 24	Novo 38
A	14"	11"	11"	14"	11"	11"
B	22 1/2"	22 1/2"	22 1/2"	22 1/2"	22 1/2"	22 1/2"
C	6"	6"	6"	6"	6"	6"
D	12 5/8"	12 1/8"	11 1/2"	12 5/8"	12 1/8"	11 1/2"
E	3"	1 1/4"	1 1/2"	3"	1 1/4"	1 1/2"
F	14 7/8"	14 7/8"	14 7/8"	14 7/8"	14 7/8"	14 7/8"
G	84"	84"	84"	84"	84"	84"
I	7"	7"	7"	7"	7"	7"
J	8"	8"	8"	N/A	N/A	N/A
K	8"	8"	8"	8"	8"	8"
L	N/A	N/A	N/A	8"	8"	8"
M	18"	18"	18"	16"	16"	16"

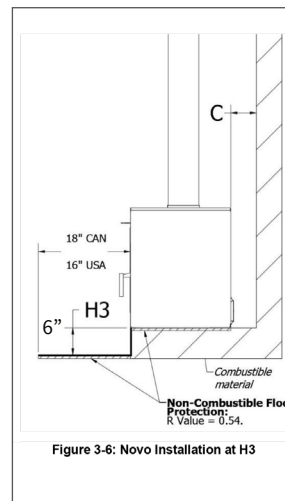


Figure 3-6: Novo Installation at H3

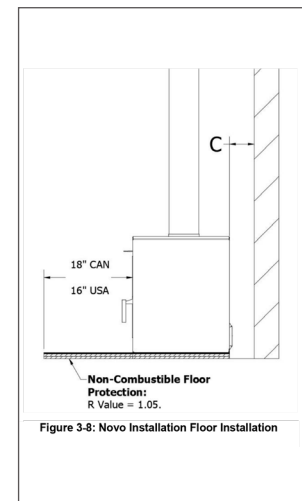


Figure 3-8: Novo Installation Floor Installation



3594 Jarry East, Montreal, Quebec H1Z 2G4
 Telephone: 514 593.4722 Toll-free: 1 877 593.4722
 www.supremem.com | info@supremem.com

Information and images contained in this catalog are subject to change and should be used for reference only. All installations should be done in accordance to the specifications detailed in the owner's manual.