



Crafted warmth for homes that weather the seasons.







PATENTED AUTOMATIC AIR CONTROL

This patented, user-friendly mechanism automatically reduces the amount of combustion air introduced during ignition to the **PATENTED** desired burn rate setting. The result is a beautifully consistent fire burning to its full capacity.





REVERSIBLE CAST IRON PANELS

Crafted with care, our heavy-duty cast iron panels are stamped with a brick pattern on one side and a flowing contemporary design on the other. These reversible panels provide a versatile design that is as beautiful as it is functional.

QUALITY CONSTRUCTION

Supreme manufactures high-quality fireplaces by combining advanced engineering with premium materials like steel for durability and efficiency. Their fireplaces feature airtight combustion systems for optimal heat output and energy efficiency, while also offering sleek, stylish designs to suit various interiors.









FACEPLATE OVERLAY

A 12 gauge thick faceplate is offered optionally to aesthetically conceal the opening between the existing masonry fireplace and the surround of the unit. It can easily be trimmed all depending on the installation and the dimensions.

UNIQUE DOOR OPERATION

The dual blower system helps distribute the convection heat more efficiently into the room. As the combustion progresses, the blowers automatically activate with the heat and can be set using the variable speed control.





DUAL BLOWER SYSTEM (110 CFM)


Pre-assembled on the circulating chamber, the blowers help circulate the warm air into the room. As the combustion progresses, the blowers automatically activate with the heat and can be set using the variable speed control.



LUMIS 16


DIMENSIONS


MINIMUM OPENING

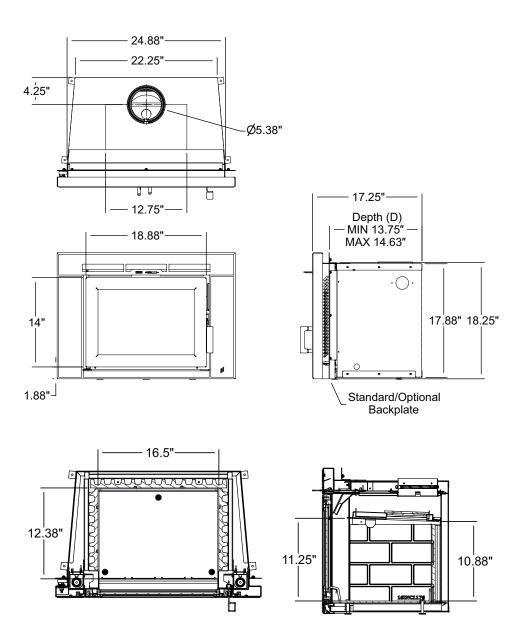

MINIMUM OPENING	
Model:	LUMIS 16
Width (Front) - WF	25.00" (635 mm)
Width (Back) - WB	22.50" (572 mm)
Height (Front) - HF	18.25" (464 mm)
Height (Back) - HB	17.88" (454 mm)
Depth (Adjustable) - D	13.75" (349 mm) to 14.63" (371 mm)

BACK PLATE







LUMIS 22

DIMENSIONS


DIMENSION






— 12.75**"**—

5.38"




13.88"

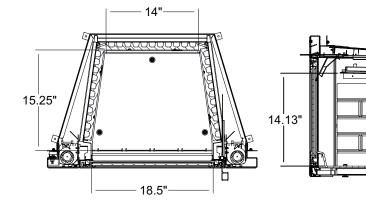


MINIMUM OPENING


MINIMUM OPENING	
Model:	LUMIS 22
Width (Front) - WF	29.00" (737 mm)
Width (Back) - WB	19.00" (483 mm)
Height (Front) - HF	20.00" (508 mm)
Height (Back) - HB	18.38" (467 mm)
Depth (Adjustable) - D	17.00" (432 mm) to 17.88" (454 mm)


BACK PLATE

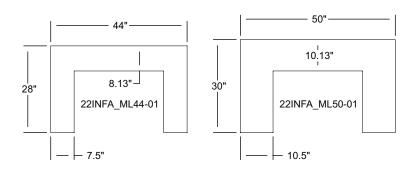




LUMIS 32

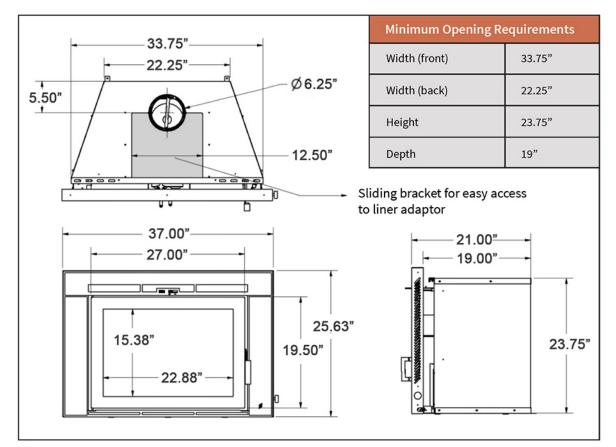

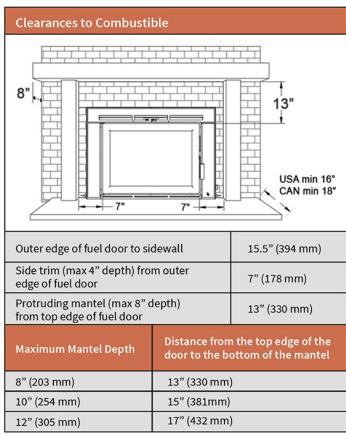

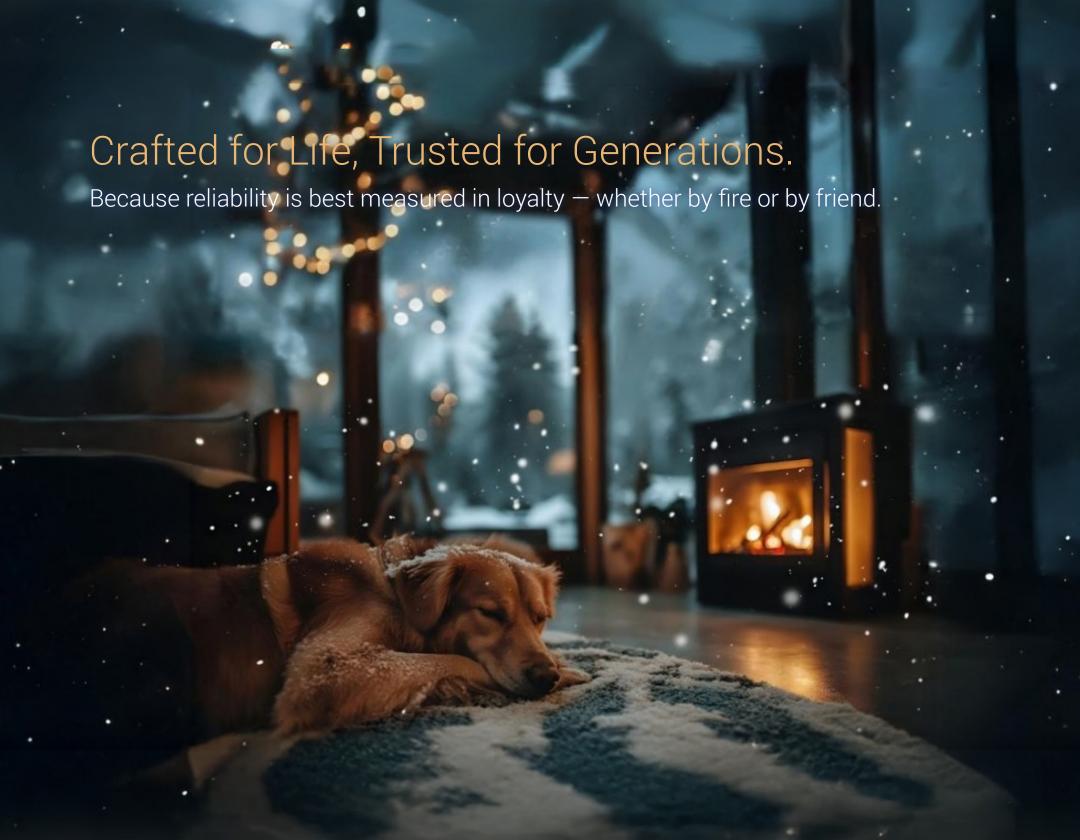



A family legacy of innovating fire.





3594 Jarry East, Montreal, Quebec H1Z 2G4
Telephone: 514.593.4722 Toll-free: 1.877.593.4722 Fax: 514.593.4424
www.supremem.com | info@supremem.com

Information and images contained in this catalog are subject to change and should be used for reference only. All installations should be done in accordance to the specifications detailed in the owner's manual.